



ProSolve PETRO TAPE

Technical Data Sheet


According to Regulation (EU) No 830/2015 and Regulation (EC) No 1272/2008

Date Revised: 04/09/2023 Version: 1.2

TECHNICAL DATA SHEET

ProSolve Petro Tape

- A waterproof and anti-corrosive tape for the protection of metal fittings whether on the surface, buried or immersed in water.
- Petroleum impregnated
- Available in 50mm, 75mm and 100mm widths
- Length: 10m
- Alternative to brands like Denso
- Soft and wet, with outstanding corrosion protection ability (Service Temperature -270°C ~ 60°C)
- Standard Type - can be applied to a wide range of working places

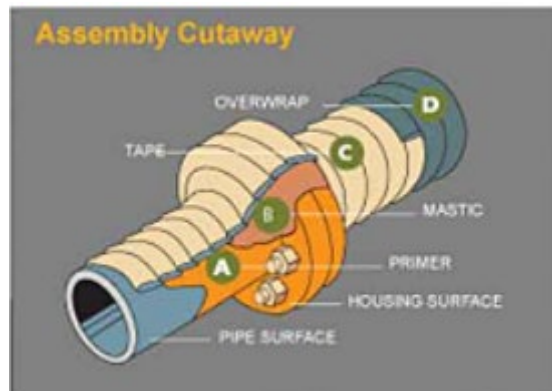

APPLICATION INSTRUCTION

1. Remove moisture, oil, dust and scale etc. on the surface by rag, chipper or scraper
2. Wrap Petro with enough tension to assure conformity to the surface
3. BURIED OR IMMERCES PIPES: Wrap with at least a 50% overlap
4. DO NOT overstretch
5. Complete the wrapping by wrapping the tape over itself for one complete circumference
6. To protect the meta surface, petro tape must cover the entire surface
7. Carefully wrap fittings covering the whole fitting with at least two layers
8. A final wrap of PVC Tape is recommended for the prevention of wrapped Petro Tape from mechanical damages and for the good appearance of the wrapped items.

HANDLING

- Wear gloves (avoid contact with skin)
- Wash hands thoroughly with soap and warm water after use
- Remove and clean soiled clothing

BEFORE USE, CONSULT THE SAFETY DATA SHEET OF THE PRODUCT.